



**ADVANCED
ACCESS PLATFORMS**

Rough Terrain Scissor Lifts

CE 2006/42/EC, 2004/108/EC, 2000/14/EC

Genie® GS™ -2669 DC, GS-3369 DC & GS-4069 DC

Specifications

Models	GS-2669 DC		GS-3369 DC		GS-4069 DC	
Measurements	US	Metric	US	Metric	US	Metric
Working height max. ⁽¹⁾	32 ft 2 in	10 m	38 ft 8 in	11.96 m	46 ft 3 in	14.3 m
A Platform height max.	26 ft 2 in	8 m	32 ft 8 in	9.96 m	40 ft 3 in	12.3 m
B Platform height - stowed	4 ft 10 in	1.47 m	4 ft 10 in	1.47 m	5 ft 5 in	1.65 m
C Platform length - outside	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m
Platform length - outside, extended	14 ft 2 in	4.32 m	14 ft 2 in	4.32 m	14 ft 2 in	4.32 m
Slide-out platform extension deck - length	5 ft	1.52 m	5 ft	1.52 m	5 ft	1.52 m
D Platform width - outside	5 ft 3 in	1.60 m	5 ft 3 in	1.60 m	5 ft 3 in	1.60 m
Toeboard height	6 in	15 cm	6 in	15 cm	6 in	15 cm
E Height - stowed (folding rails)	8 ft 6 in	2.59 m	8 ft 6 in	2.59 m	9 ft	2.74 m
Height - stowed (rails lowered)	6 ft 3.5 in	1.92 m	6 ft 3.5 in	1.92 m	6 ft 10 in	2.08 m
F Length machine - stowed	10 ft 3 in	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in	3.12 m
Length machine - stowed, extended	14 ft 9.5 in	4.5 m	14 ft 9.5 in	4.5 m	14 ft 9.5 in	4.5 m
Length machine - with outriggers	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m
G Width	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m
H Wheelbase	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
I Ground clearance (center)	9.5 in	24 cm	9.5 in	24 cm	9.5 in	24 cm

Productivity

	4/4		4/2		3/2	
Max. platform occupancy (in/out)						
Lift capacity	1,500 lb	680 kg	1,000 lb	454 kg	800 lb	363 kg
Lift capacity - extension deck extended	300 lb	136 kg	300 lb	136 kg	300 lb	136 kg
Max. platform drive height	26 ft 2 in	8 m	32 ft 8 in	9.96 m	40 ft 3 in	12.3 m
Drive speed - stowed	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h
Drive speed - raised	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h
Gradeability - stowed ⁽²⁾	35 %		35 %		35 %	
Turning radius - inside/outside	83 in/181.2 in	2.11 m/4.6 m	83 in/181.2 in	2.11 m/4.6 m	83 in/181.2 in	2.11 m/4.6 m
Lifting speed - raise/lower	34/31 sec		39/29 sec		61/28 sec	
Tilt sensor activation (front to back/side to side)	3°/2°		3°/2°		3°/2°	
Max. outrigger leveling (front to back/side to side)	5.3°/11.7°		5.3°/11.7°		5.3°/11.7°	

Drive

Tires - Non-marking, rough terrain	12×26 in	30×66 cm	12×26 in	30×66 cm	12×26 in	30×66 cm
------------------------------------	----------	----------	----------	----------	----------	----------

Power




Power	48V DC (8×6V 225Ah)	48V DC (8×6V 225Ah)	48V DC (8×6V 225Ah)			
Hydraulic tank capacity	18 gal	68.1 L	18 gal	68.1 L	18 gal	68.1 L

Weight⁽³⁾ and Floor Loading⁽⁴⁾

	GS-2669 DC		GS-3369 DC		GS-4069 DC	
Weight	7,946 lb	3,604 kg	7,687 lb	3,487 kg	10,948 lb	4,966 kg
Weight with outriggers	8,796 lb	3,990 kg	8,537 lb	3,873 kg	11,798 lb	5,352 kg
Tire load max.	3,334 lb	1,512 kg	3,199 lb	1,451 kg	3,752 lb	1,702 kg
Tire contact pressure	83.3 psi	575 kPa	80 psi	551 kPa	93.3 psi	643 kPa
Occupied floor pressure	184 psf	8.83 kPa	171 psf	8.19 kPa	221 psf	10.60 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	70 dBA	70 dBA	70 dBA			
Sound Pressure level (platform workstation)	79 dBA	79 dBA	79 dBA			
Vibrations	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²

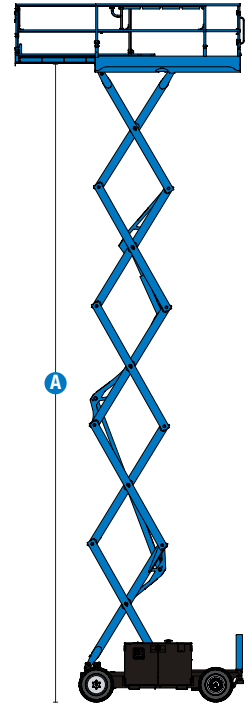

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.
 (2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
 (3) Weight refers to standard configuration and may vary depending on options and/or country standards.
 (4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™ -2669 DC, GS-3369 DC & GS-4069 DC

SKU: Standard Model

- **GS266901CE0002:** GS-2669 DC, 220V
- **GS266901CE0003:** GS-2669 DC, 220V, Auto leveling outriggers
- **GS336901CE0002:** GS-3369 DC, 220V
- **GS336901CE0001:** GS-3369 DC, 220V, Auto leveling outriggers

* Build to Order

SKU: Standard Model


- **GS406901CE0002:** GS-4069 DC, 220V
- **GS406901CE0001:** GS-4069 DC, 220V, Auto leveling outriggers

Option availability		S	S+	BtO
Power	110V/50Hz			<input type="radio"/>
	48V DC drive system		<input checked="" type="checkbox"/>	
	High capacity DC battery (Standard on GS-4069 DC)		<input checked="" type="checkbox"/>	<input type="radio"/>
	Standard FLA flooded lead acid batteries		<input checked="" type="checkbox"/>	
Platform	AC power to platform		<input checked="" type="checkbox"/>	
	Air line to platform			<input type="radio"/>
	Diamond plate platform deck		<input checked="" type="checkbox"/>	
	Electronic horn		<input checked="" type="checkbox"/>	
	Folding rails, Full-height swing gate		<input checked="" type="checkbox"/>	
	Lanyard attachment points		<input checked="" type="checkbox"/>	
	Link guards (GS-4069)		<input checked="" type="checkbox"/>	
	Platform control guard (PCON)		<input checked="" type="checkbox"/>	
	Platform load sense system		<input checked="" type="checkbox"/>	
	Power to platform with RCBO		<input type="radio"/>	<input type="radio"/>
	Power to platform, no RCBO		<input checked="" type="checkbox"/>	
	Proportional drive and lift		<input checked="" type="checkbox"/>	
	Self-closing entry gate		<input checked="" type="checkbox"/>	
	Single slide-out extension deck		<input checked="" type="checkbox"/>	
	SmartLink dual zone control system		<input checked="" type="checkbox"/>	
	Chassis	2 wheel drive		<input checked="" type="checkbox"/>
Active oscillating axle			<input checked="" type="checkbox"/>	
Auto leveling hydraulic outriggers				<input type="radio"/>
Descent, tilt and motion alarm			<input checked="" type="checkbox"/>	
Dual LED flashing beacons			<input checked="" type="checkbox"/>	
Dual wheel multi-disc brakes			<input checked="" type="checkbox"/>	
Eco32 biodegradable hydraulic oil				<input type="radio"/>
Lift Connect Telematics			<input type="radio"/>	<input type="radio"/>
Lift Connect with Access Manager upgrade			<input type="radio"/>	<input type="radio"/>
On-board diagnostic system with battery charge indicator			<input checked="" type="checkbox"/>	
Rear axle sealed AC drive motors			<input checked="" type="checkbox"/>	
Rough Terrain, foam-filled, non-marking tires			<input checked="" type="checkbox"/>	
Tech Pro Link connector		<input checked="" type="checkbox"/>		

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Rough Terrain Capabilities



Full Height Drive



Sealed AC Drive Motors



Genie Genuine Accessories⁽¹⁾

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.



ADVANCED ACCESS PLATFORMS

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.