



**ADVANCED
ACCESS PLATFORMS**

SJ6826/32

ROUGH TERRAIN SCISSORS



STANDARD FEATURES

- Crossover symmetrical 4WD
- Drivable at full height with roll out deck fully extended
- Shroud style, impact resistant composite control box with extended cable
- 5' (1.52 m) Roll out extension deck
- Dual fuel (gas/propane) or diesel engine
- 90° Swing out engine tray
- Multiple wet disc spring applied hydraulic release brakes
- 110V AC Outlet on platform with GFI
- Up to 50% gradeability
- Foam-filled low profile grip lug tires
- Tilt alarm with drive & lift cut-out
- Tilt sensor (4.5° x 2.5°)
- Lanyard attachment points
- All motion audible alarm
- Operator horn
- Hinged railing system
- Forklift pockets and tie down /lift lugs
- Overload sensing system
- Fold down hinged railing system
- Full height spring hinged entry gate at rear of unit
- SKYCODED™ Color coded and numbered wiring system
- Telematics ready
- 2-Year Gold Leaf Warranty (5-year structural warranty)



OPTIONS

- Heavy duty pipe rack
- Tool caddy
- Diesel scrubber for tier 4 final engine
- Independent/auto leveling outriggers
- Flashing light
- 3.5 kW Hydraulic generator
- Cold weather start package
(Includes hydraulic oil tank heater, battery blanket, coolant or block heater)
- Positive air shut-off valve
- Bio oil
- Non-destructive testing
- Secondary Guarding Lift Enable (SGLE)
- Non-marking grip lug foam-filled tires
- ELEVATE telematics (3-year or 5-year plans available)
- Warranty options (3-year or 5-year plans available)

† Standard lead times may be increased when optional equipment is added, consult factory.
‡ Capacities and machine weights may differ when options are added.

SJ6826/32 RT ROUGH TERRAIN SCISSORS

Dimensions	SJ6826 RT	SJ6832 RT
A Work Height	32' (9.75 m)	38' (11.58 m)
B Raised Platform Height	26' (7.92 m)	32' (9.75 m)
C Lowered Platform Height	48.5" (1.23 m)	54" (1.37 m)
D Overall Width	69.5" (1.76 m)	69.5" (1.76 m)
E Overall Length	107" (2.72 m)	107" (2.72 m)
F Stowed Height (Rails Up)	93.5" (2.38 m)	99" (2.51 m)
G Stowed Height (Rails Down)	63.5" (1.61 m)	69" (1.75 m)
H Platform Width (Inside Dimension)	56" (1.42 m)	56" (1.42 m)
I Platform Length (Inside Dimension)	96" (2.44 m)	96" (2.44 m)
Specifications	SJ6826 RT	SJ6832 RT
Extension Deck	5' (1.52 m)	5' (1.52 m)
Ground Clearance	8" (0.20 m)	8" (0.20 m)
Wheelbase	80.5" (2.04 m)	80.5" (2.04 m)
Weight	6,460 lbs (2,930 kg)	7,590 lbs (3,443 kg)
Gradeability	50%	40%
Turning Radius (Inside)	60" (1.52 m)	60" (1.52 m)
Turning Radius (Outside)	156" (3.96 m)	156" (3.96 m)
Lift Time (With Rated Load)	36 sec	39 sec
Lower time (With Rated Load)	36 sec	36 sec
Drive Speed (Stowed)	3.8 mph (6.1 km/h)	3.8 mph (6.1 km/h)
Drive Speed (Raised)	0.4 mph (0.6 km/h)	0.4 mph (0.6 km/h)
Maximum Drive Height	Full Height	Full Height
Capacity (Overall)	1,250 lbs (567 kg)	1,000 lbs (454 kg)
Distributed Capacity (Main Platform)	950 lbs (431 kg)	700 lbs (318 kg)
Distributed Capacity (Extension Deck)	300 lbs (136 kg)	300 lbs (136 kg)
Local Floor Load (With Rated Load)	190 psi (1,310 kPa)	216 psi (1,500 kPa)
Overall Floor Load (With Rated Load)	170 psf (830 kg/m ²)	200 psf (976 kg/m ²)
Maximum # of persons up to 28 mph (12.5 m/s) wind rating	4	4
Diesel Engine	24.8 HP Kubota	24.8 HP Kubota
Fuel Tank	23 gal (87 L)	23 gal (87 L)
Hydraulic Reservoir	23 gal (87 L)	23 gal (87 L)
Outrigger Leveling (Front to Back / Side to Side)	5° / 8°	5° / 8°
Tire Type	Foam-Filled	Foam-Filled
Tire Size	26 x 12	26 x 12

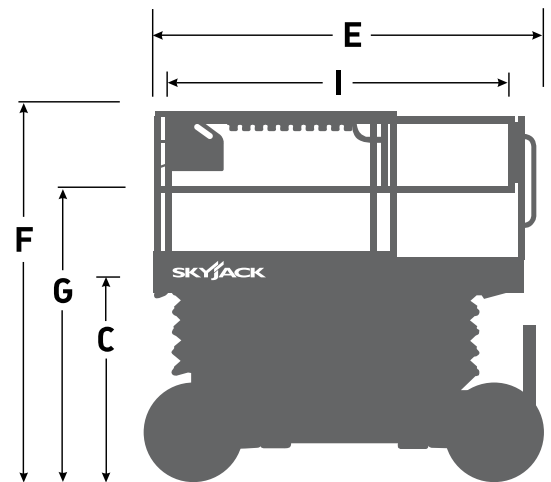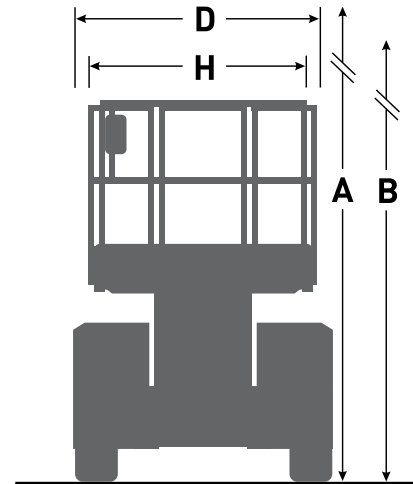

Skyjack Head Office
 55 Campbell Rd. Guelph, ON Canada N1H 1B9
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
 Main Switchboard: 1-800-265-2738
 Phone: 519-837-0888
 Fax: 519-837-8104
 Email: skyjack@skyjack.com

www.skyjack.com

